


High Shield RG Series Coaxial Cable (High Shield Coverage, Standard Construction)

Application and Usage

- CCTV installation
- CATV/MATV
- Satellite TVRO/Internet
- Telecomm Interconnect

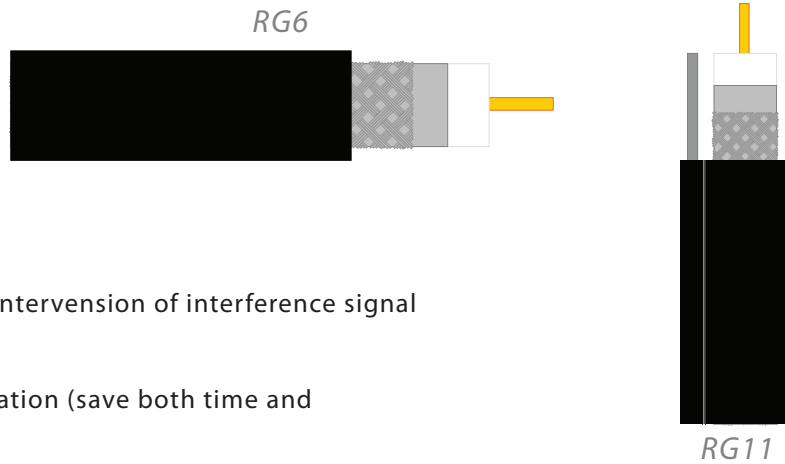

Product Highlights

- High density shielding to protect the intervention of interference signal entering the cable system.
- Standard signal attenuation
- Don't waste the time for cable reinstallation (save both time and unexpected expenses)

Physical Construction

Product Code	Descriptions	Inner Conductor	Insulation	Shielding	Jacket	Special Configuration
RG-6U Series						
AZK695BV	RG-6/U Standard	1.02mm CCS	4.57mm Foam PE	AL/P-Foil +0.12 x 144ALWB (95%)	6.90mm PVC	- 1.20/2.80mm Messenger
AZK695BVM	RG-6/U + Messenger					
RG-11U Series						
AZK695BV	RG-11/U Standard	1.63mm CCS	7.11mm Foam PE	AL/P-Foil +0.16 x 168ALWB (95%)	10.03mm PVC	- 1.83/3.80mm Messenger
AZK695BVM	RG-11/U + Messenger					

Nom. Attenuation (dB/100 Meters)@20C

Descriptions	RG-6/U	RG-11U
5	1.90	1.25
30	3.90	2.40
55	5.25	3.15
187	9.35	5.74
250	10.82	6.72
350	12.63	7.94
450	14.43	9.02
550	16.08	9.97
750	18.54	11.97
800	19.25	12.00
870	19.99	12.08
1000	21.49	14.27

Electrical Specifications

Impedance	: 75±3Ω
Capacity	: 54±3 pF/M

Packing Information

Length	: 100M/Coil
	: 500M/Spool
	: 1000M/Spool

*ทางบริษัทของสงวนสิทธิ์ในการปรับปรุง แก้ไข เปลี่ยนแปลงโดยไม่มีแจ้งให้ทราบล่วงหน้า