

Fiber Media Converter

1 Optic & 1 Ethernet ; -30°C~ +75°C ; Single Mode Single Core




Main Feature

- * Industrial-Grade Protection
- * Dust-Proof Excellent Heat Dissipation
- * CPU Runs Stable
- * -30°C~ +75°C Wide Temperature
- * Install Neat Beauty
- * Plug & Play

Plug & Play



Plug & Play

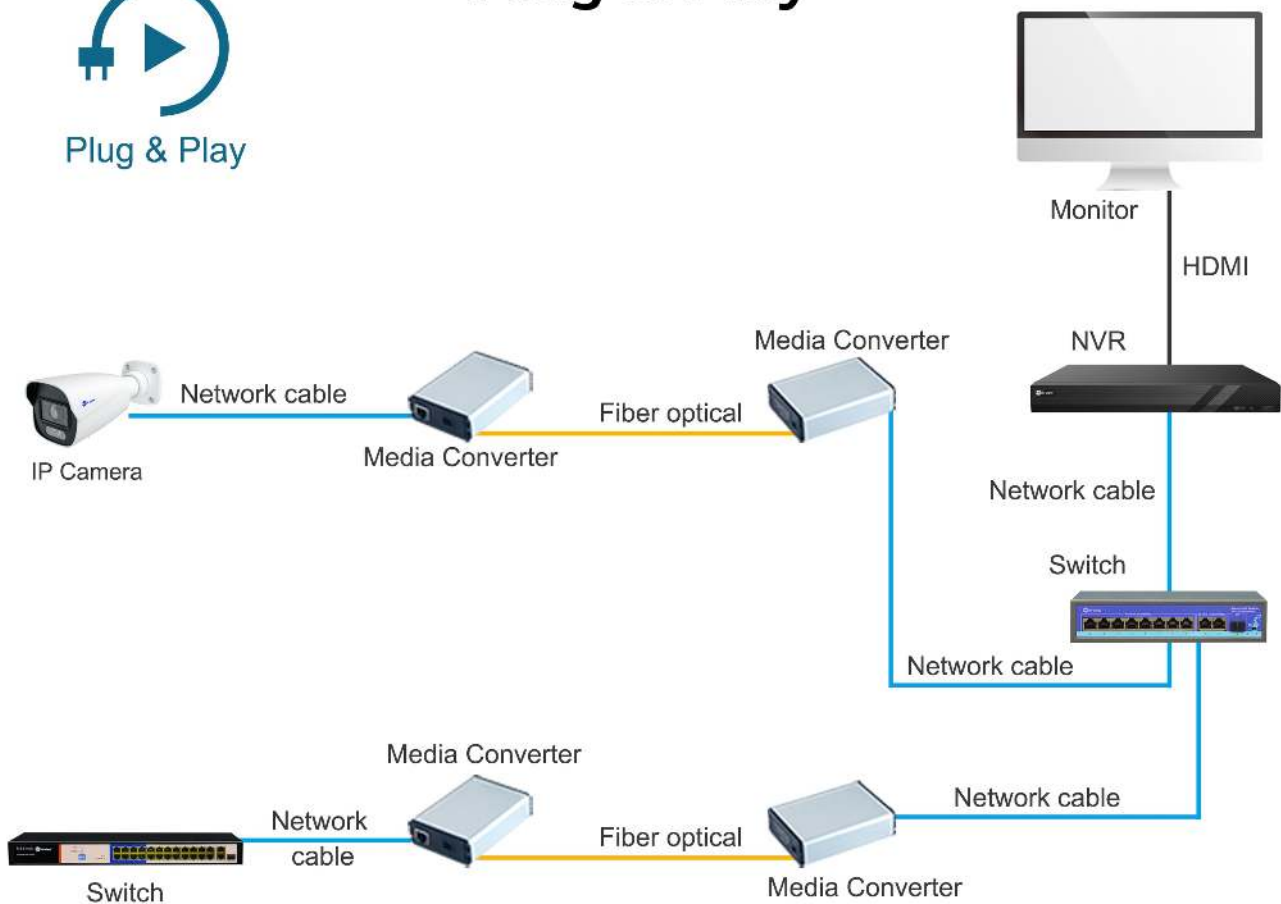


Fiber Media Converter

1 Optic & 1 Ethernet ; -30°C~ +75°C ; Single Mode Single Core



Link Way

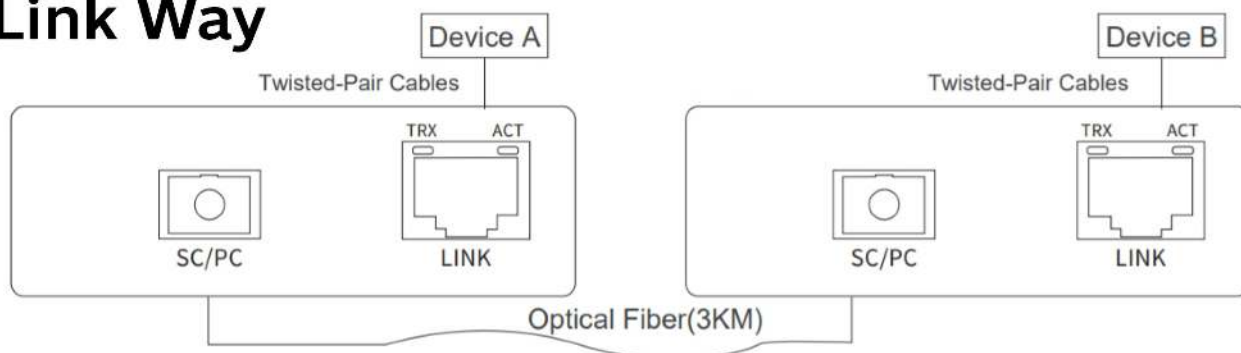

Specification

| Model | HG-FCS20AB-M(IN) |
|-----------------------------|---|
| Protocol Standard | IEEE802.3/u |
| Network Interface | RJ45 10/100Mbps Self-Adaption Transmission Distance:100m |
| Fiber Interface | Single Mode SC Optical Fiber Type:Single Mode 9/125μm 1310T/1550R (A) / 1550T/1310R (B) Transmission Rate:100Mbps Transmission Distance:≤20KM |
| Performance & Specification | Forwarding Mode:Store Forward Transfer Mode:Full Duplex Full Duplex Automatic Connection Network Latency:≤150μs |
| Power | Power Type:External Power Power Input:AC100V~240V 50/60Hz Power Inout:DC5V1A DC Socket:2.5x5.0mm |
| Physical Specifications | Size:95*70*25mm, Weight: 0.05KG |
| Working Environment | Operating Temperature: -30°C~75°C Storage Temperature: -10°C~55°C Operating Humidity: 10%~90% Non-condensing Storage Humidity: 5%~90% Non-condensing |
| Certification Warranty | CE Mark FCC Part15,Class B RoHS 2.0, Whole Device: 1 year |
| Package Content | AC Power Cable,User Manual |