




CCTV SURVEILLANCE

Network Video Recorder

HP-9708PE

6M PIXEL HD
Network Video Recorder

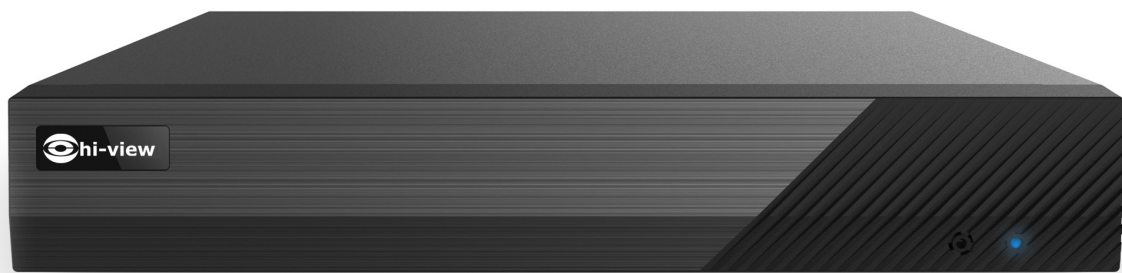

NVR 9700 SERIES

NVR SURVEILLANCE NETWORK VIDEO RECORDER

- HD Output
- HD IPC
- DDNS
- Network
- PTZ
- Audio
- Mobile
- CMS
- USB
- Mouse
- E-mail
- STD
- VCA

H.265S





NVR 9700 SERIES

NVR SURVEILLANCE NETWORK VIDEO RECORDER

Specification



Feature

- * Support 8CH 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P / 960H DI / CIF IP video input
- * H.265S / H.265+ / H.265 / H.264 coding
- * Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- * Multi-type recording: manual / timed / motion / sensor / POS / AI recording
- * Playback: 8CH simultaneous playback
- * Search: time slice, time, event, tag, smart search
- * Support multiple VCA (Video Content Analytics) events, such as object abandoned / missing, region intrusion, tripwire, video exception, crowd density, etc.
- * Support POS information overlay on live view and playback
- * Express and flexible backup via USB, network and so on
- * Support preview, record, playback, backup and remote access
- * DHCP, DDNS, PPPoE network protocol
- * 8 PoE network ports; IPCs can be directly connected to NVR; PoE power supply supported
- * Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- * Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- * Authorization management, log view and device status view
- * 1080P HD output, true high resolution display
- * Support NAT function and QRCode scanning by mobile phones
- * Powerful mobile surveillance by smart phones with iOS and Android OS

Model	HP-9708PE
OS	Embedded Linux
Video	
Network Input	8 CH IPC input
Network Input Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/D1/CIF
Output	HDMIx1: 1920x1080 / 1280x1024 / 1024x768 VGA: 1920x1080 / 1280x1024 / 1024x768 HDMI and VGA output the same video source
Compression	H.265S / H.265+ / H.265 / H.264
Multi-screen Display	1 / 4 / 6 / 8 / 9
Audio	
Network Input	8 CH IPC audio input
Compression	G.711(U/A)
Record	
Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/D1/CIF
Frame Rate	30fps / 25fps (NTSC / PAL)
Playback	
Simultaneous Playback	Max. 8 CH
Search	Time slice / time / event / tag / smart search
Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Function	Play, pause, FF, FB, digital zoom, etc.
Decoding Capability	
Live View / Playback	1CH 6MP; 4CH 1080P
Alarm	
Type	Manual, sensor, motion, exception, smart events, etc.
Triggering	Record, snapshot, buzzer, preset, e-mail, etc.
Network	
Interface	RJ 45 100Mbps x 1
Protocol	TCP / IP, HTTP, HTTPS, 802.1, DHCP, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IPv6, IPv4, UDP, WebSocket, PPPoE, SNMP, IGMP, ONVIF, etc.
Incoming / Outgoing Bandwidth	64/64 (Mbps) *When the AI function of the IPC is enabled, the actual incoming bandwidth (max.bitrate) is more than the set value in the NVR.
Client Connection	Max. 64 users access
Mobile Device	
OS	iOS, Android
Storage	
HDD Interface	SATA3.0 x 1, max 10TB
Backup	
Local Backup	USB flash drive
Network Backup	Yes
Port	
USB	USB 2.0 x 2
PoE	
PoE Ports	100M RJ45 x 8
Standards	IEEE802.3AF / AT
Output Power	≤ 72W
Others	
Power Supply	DC 48V/1.8A
Consumption	≤ 5W (without HDD, and PoE off)
Dimensions (mm)	255 x 222 x 42 (W x D x H)
Working Environment	-10 ~ 50°C, 10% ~ 90% humidity

