




CCTV SURVEILLANCE

Network Video Recorder

HP-9708-V1

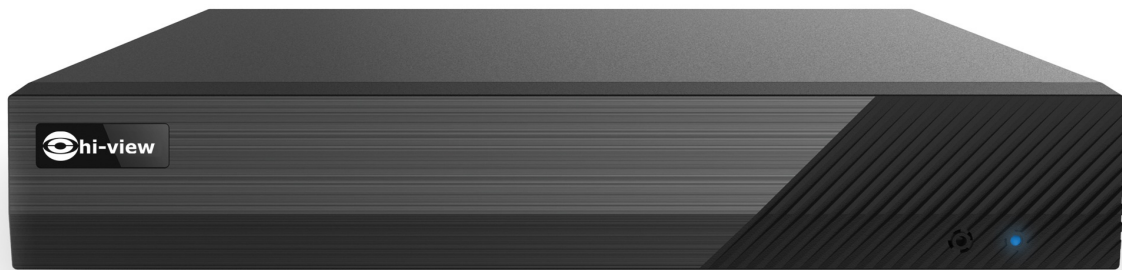

NVR 9700 SERIES

NVR SURVEILLANCE NETWORK VIDEO RECORDER




H.265





NVR 9700 SERIES

NVR SURVEILLANCE NETWORK VIDEO RECORDER

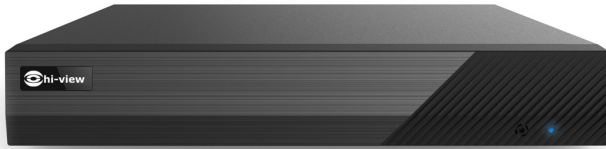

Feature

- * Support 8CH 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P 960H / DI / CIF IP video input
- * H.265S / H.265+ / H.265 / H.264 coding
- * Intuitive and user-friendly Graphic User Interface (GUI). Windows style operation by mouse
- * Multi-type recording: manual / timed / motion / sensor / POS / AI recording
- * Playback : 8CH simultaneous playback
- * Search: time slice, time, event, tag, smart search
- * Support multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video exception, crowd density, etc. Support POS information overlay on live view and playback
- * Express and flexible backup via USB, network and so on
- * Pentaplex : preview, record, playback, backup and remote access DHCP, DDNS, PPPoE network protocol
- * Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- * Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device Authorization management, log view and device status view
- * 1080P HD output, true high resolution display
- * Support NAT function and QRCode scanning by mobile phones
Powerful mobile surveillance by smart phones with iOS and Android OS

Specification

Model	HP-9708-V1
OS	Embedded Linux
Video	
Network Input	8 CH IPC input
Network Input Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/D1/CIF
Output	HDMI x1: 1920x1080 / 1280x1024 / 1024x768 VGA: 1920x1080 / 1280x1024 / 1024x768 HDMI and VGA output the same video source
Compression	H.265S / H.265+ / H.265 / H.264
Multi-screen Display	1 / 4 / 6 / 8 / 9
Audio	
Network Input	8 CH IPC audio input
Local Output	No (HDMI supports the audio output)
Compression	G.711(U/A)
Record	
Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/D1/CIF
Frame Rate	30fps / 25fps (NTSC / PAL)
Playback	
Simultaneous Playback	Max. 8 CH
Search Time	slice / time / event / tag /smart search
Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Function	Play, pause, FF, FB, digital zoom, etc.
Decoding Capability	
Live View / Playback	1CH 6MP; 4CH 1080P
Alarm	
Type	Manual, sensor, motion, exception, smart events, etc.
Input	Support IPC alarm input
Output	Support IPC alarm output
Triggering	Record, snapshot, buzzer, preset, e-mail, etc.
Network	
Interface	RJ 45 100Mbps x1
Protocol	TCP / IP, IPv4, IPv6, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, RTSP, ONVIF, etc.
Incoming Bandwidth	64 Mbps
Outgoing Bandwidth	64 Mbps
Client Connection	Max. 10 users access
LPR	
Plate Recognition	Yes
Mobile Device	
OS	iOS, Andriod
Storage	
HDD Interface	SATA3.0 x1, max 10T
Backup	
Local Backup	U disk, USB mobile HDD
Network Backup	Yes
Port USB	USB 2.0 x2
Others	
Power Supply	DC 12V/1.5A
Consumption	5W (without HDD)
Dimensions (mm)	255 x 222 x 42 (W x D x H)
Working Environment	-10 ~ 50C, 10% ~ 90% humidity

